


Zoning changes for lake front lots.

Walkways, steps, platforms, or masonry patios may extend into lakefront setbacks to the high water marker if it meets the following criteria.

May not exceed 4 feet from ground to walking surface.

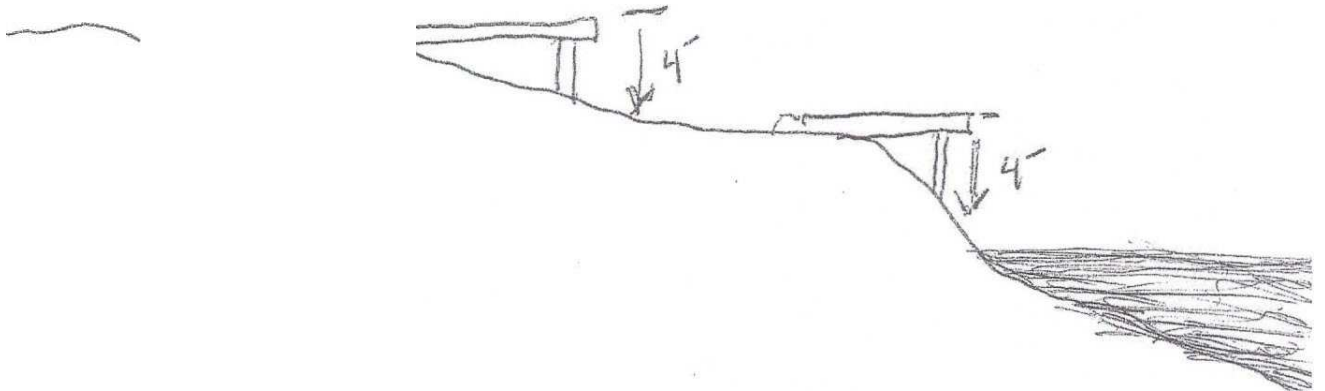

Walkways, steps, platforms, or masonry patios may not be covered with any form of roof structure, lattice, or wood framing.

Steps and platforms of wood construction will be required to have zoning approval as well as meet county building codes and regulations.

Masonry walkways and patio areas that need excavation will be required to have zoning approval. This will have to have a site plan to show earth changes proposed and the resulting drainage after work is completed, as well as a "Soil Erosion Permit" from the Iosco building department., Run off water may not wash on to neighboring lots.

Add to 10-2 L Site Development Requirements

Approved 5-4-2015